

Comply and compatible with 19 inch international standard, metric system and ETSI standard. Reliable structure and static loading achieves to 800 kg.

Adjustable feet and castors are available, moving conveniently and fixing reliable. Baying together easy, quickly efficiently and firmly.

#### Product Description


|                   |   |
|-------------------|---|
| Product Type      | Perforated Door Close Rack  |
| Product ID        | IR8032P   |
| Size              | 32U   |
| Weight            | ± 82 kg   |
| Dimension (DxWxH) | 800 x 600 x 1620 mm   |
| Complete Set with | <ul style="list-style-type: none"> <li>• Perforated Front Door, Steel Rear Door and 2 Side Door with lock</li> <li>• 1 Unit Horizontal PDU 8 outlet with switch</li> <li>• 1 Unit Bracket Fan Modular with 2 Fan</li> <li>• 1 pc Fixed Shelf</li> <li>• 1 pc Top Brush Panel</li> <li>• 1 set Cable Ring</li> <li>• 1 set Adjustable Foot of 4</li> <li>• 1 set Castor of 4</li> <li>• 100 set M06 (Cagenuts &amp; Screws)</li> </ul> |



Front View



#### Product Drawing

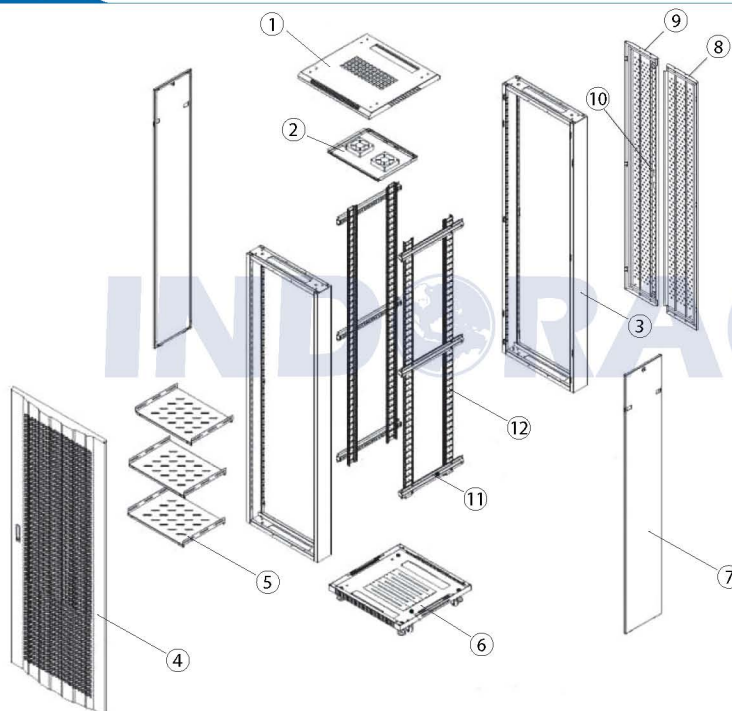

1. Top Panel
2. Fan Tray
3. Frame
4. Front Door
5. Shelf
6. Bottom Panel
7. Side Door
8. Left Rear Door
9. Right Rear Door
10. Rear Door Lock
11. Mounting Angle
12. Mounting Profile



Side View



L Tower Bolt Lock Inside



Back View

Optional cable entry on top cover and bottom panel. Front door, rear door and side panel can be removed facility, the bottom has the function of ventilation and rat-proof. Varies optional accessories, reliable quality.



### Product Drawing

