## IND®RACK NETWORK CABINET

## IRP11542P

Comply and compatible with 24 inch international standard, metric system and ETSI standard. Reliable structure and static loading achieves to 800 kg.

Adjustable feet and castors are available, moving conveniently and fixing reliable. Baying together easy, quickly efficiently and firmly.

D 1 1	<b>—</b> • • • • • • • • • • • • • • • • • • •
Product	Description
HOUGE	Description


Troduct Description	
Product Type	Perforated Door Close Rack
Product ID	IRP11542P
Size	42U
Weight	± 120 kg
Dimension (DxWxH)	1150 x 800 x 2070 mm
Complete Set with	<ul> <li>Perforated Front Door, Steel Rear Door and 2 Side Door with lock</li> <li>1 Unit Horizontal PDU 12 outlet w/ switch</li> <li>2 Unit Fan Modular w/ 2 Fan</li> <li>1 pc Fixed Shelf</li> <li>1 pc Top Brush Panel</li> <li>1 set Cable Ring</li> <li>1 set Adjustable Foot of 4</li> <li>1 set Castor of 4</li> <li>100 set M06 (Cagenuts &amp; Screws)</li> </ul>



**Front View** 



## **Product Drawing**

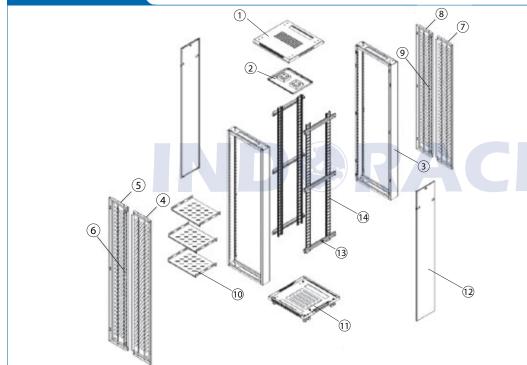

- 1. Top Panel
- 2. Fan Tray
- 3. Frame
- 4. Left Front Door
- 5. Right Front Door
- 6. Front Door Lock
- 7. Left Rear Door
- 8. Right Rear Door
- 9. Rear Door Lock
- 10. Shelf
- 11. Bottom Panel
- 12. Side Door
- 13. Mounting Angle
- 14. Mounting Profile







Side View

Optional cable entry on top cover and bottom panel. Front door, rear door and side panel can be removed facility, the bottom has the function of ventilation and rat-proof. Varies optional accessories, reliable quality.

**Back View** 



## **Product Drawing**

