

Comply and compatible with 19 inch international standard, metric system and ETSI standard. Reliable structure and static loading achieves to 800 kg.

High density vented hole front and rear door, with international popular tempered glass front door.




Front View



## Product Description

Product Type	Glass Door Close Rack
Product ID	IR8042G
Size	42U
Weight	± 105 kg
Dimension (DxWxH)	800 x 600 x 2050 mm
Complete Set with	<ul style="list-style-type: none"> <li>• Glass Front Door, Steel Rear Door and 2 Side Door with lock</li> <li>• 1 Unit Horizontal PDU 12 outlet with switch</li> <li>• 2 Unit Bracket Fan Modular with 2 Fan</li> <li>• 1 pc Fixed Shelf</li> <li>• 1 pc Top Brush Panel</li> <li>• 1 set Cable Ring</li> <li>• 1 set Adjustable Foot of 4</li> <li>• 1 set Castor of 4</li> <li>• 100 set M06 (Cagenuts &amp; Screws)</li> </ul>

## Product Drawing

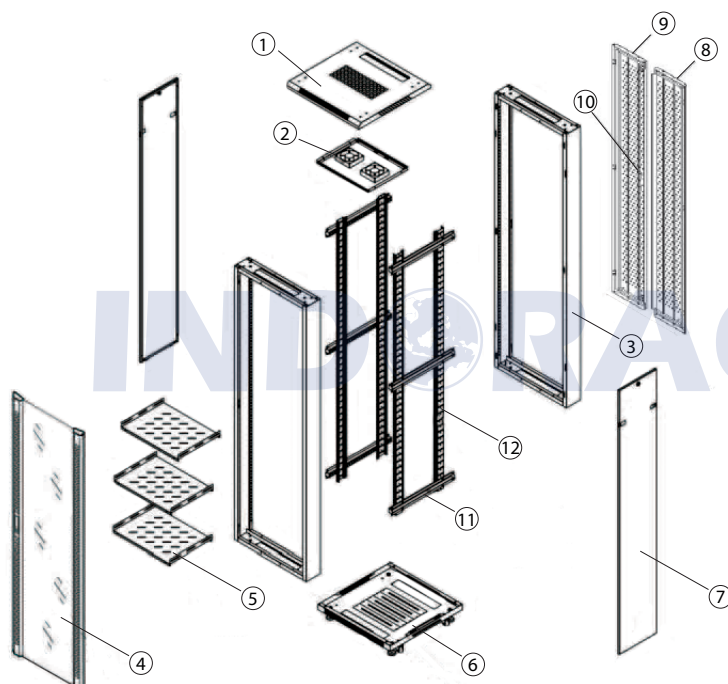

1. Top Panel
2. Fan Tray
3. Frame
4. Front Door
5. Shelf
6. Bottom Panel
7. Side Door
8. Left Rear Door
9. Right Rear Door
10. Rear Door Lock
11. Mounting Angle
12. Mounting Profile



Side View



L Tower Bolt Lock Inside



Back View

The side door easy to be installed & uninstalled quickly which make the working conveniently. Include castor & adjustable feet which make the moving and fixing easily.

Comfortable handle with safe lock front and rear door lock system enlarges the security.



## Product Drawing

