

Comply and compatible with 19 inch international standard, metric system and ETSI standard. Reliable structure and static loading achieves to 800 kg.

High density vented hole front and rear door, with international popular tempered glass front door.

## Product Description


Product Type	Glass Door Close Rack
Product ID	IR6027G
Size	27U
Weight	± 67 kg
Dimension (DxWxH)	600 x 600 x 1320 mm
Complete Set with	<ul style="list-style-type: none"> <li>• Glass Front Door, Steel Rear Door and 2 Side Door with lock</li> <li>• 1 Unit Horizontal PDU 8 outlet with switch</li> <li>• 1 Unit Bracket Fan Modular with 2 Fan</li> <li>• 1 pc Fixed Shelf</li> <li>• 1 pc Top Brush Panel</li> <li>• 1 set Cable Ring</li> <li>• 1 set Adjustable Foot of 4</li> <li>• 1 set Castor of 4</li> <li>• 100 set M06 (Cagenuts &amp; Screws)</li> </ul>



Front View



## Product Drawing

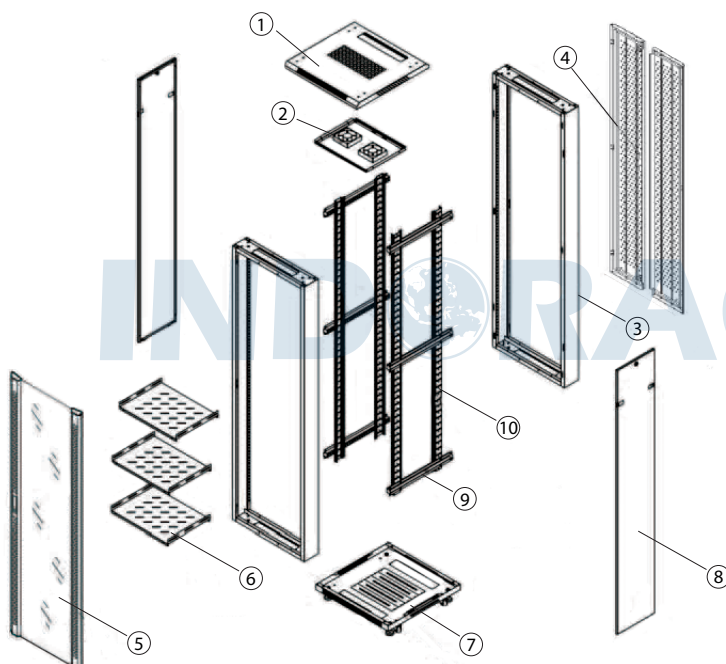

1. Top Panel
2. Fan Tray
3. Frame
4. Rear Door
5. Front Door
6. Shelf
7. Bottom Panel
8. Side Door
9. Mounting Angle
10. Mounting Profile



L Tower Bolt Lock Inside



Side View

Back View

The side door easy to be installed & uninstalled quickly which make the working conveniently. Include castor & adjustable feet which make the moving and fixing easily.

Comfortable handle with safe lock front and rear door lock system enlarges the security.



## Product Drawing

